



NOTES:

1. Material: 50 KSI Yield 26
2. Material usage: 4 1/16" approx.
3. Clip relief is standard
4. Finishes: SMP, PVDF, Acrylic coated Galvalume®
5. Minimum Roof Slope: 3:12

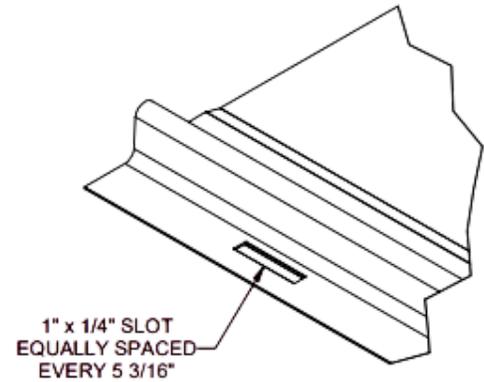

FASTENER INFORMATION

1. Fasteners should extend 0.5" or more past the inside face of substrate material.
2. Fastener should not be torqued. Overtightening can result in panel distortion.
3. Pancake head / wafer head screws should be used.

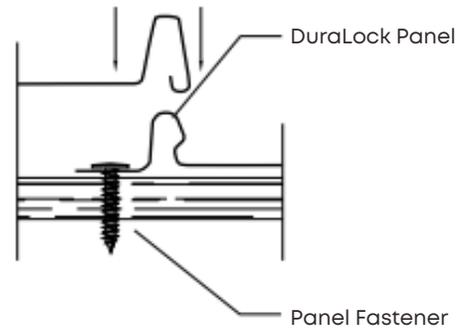

SECTION PROPERTIES								ALLOWABLE UNIFORM LOADS			
Gauge	Width (in.)	Yield (ksi)	Weight (psf)	Top In Compression		Bottom In Compression		Outward Load			
				lxx in ⁴ /ft	lyy in ⁴ /ft	lxx in ⁴ /ft	lyy in ⁴ /ft	0.5'	1'	1.5'	2'
26	16	50	0.92	103	96	90	84	103	96	90	84
24	16	50	1.19	103	96	90	84	103	96	90	84